

M-800-CT  
WB

# WHEELBARROW WHEEL EXTRA WIDE

## Wheelbarrow wheel extra wide, capacity 250 kg.

Wheelbarrow wheel extra wide.

Puncture proof tyre. (foamed polyurethane)

Light in weight.

Steel rim with double closed ball bearings.

Specially developed for crosses by sand, mud, etc. (sinks less).

50% less load on the lower back (less push resistance).


UV-stable and oil-resistant.

This extra wide wheel is available on our ERGO-TOPPERS (M-115, M-135, UNIPRO-series and the TORO).



Normal PU

Wide Body PU

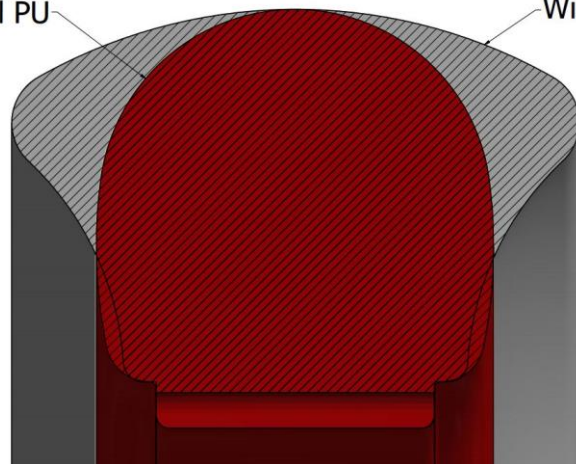

- \* 50% less load on the lower back (less push resistance).
- \* UV-stable and oil-resistant.
- \* Specially developed for crosses by sand, mud, etc. (sinks less).
- \* Measurements: Ø400x130mm

Cap. (kg)	Dimensions (mm)	Axle length	Axle (dim)	Weight (kg)	Tyre	Color	Article	Art. nr
250	Ø400x130	100	Ø20	4,3	Puncture proof (foamed polyurethane)	Gray	M-800-CT 10 WB	10450
250	Ø400x130	150	Ø20	4,3	Puncture proof (foamed polyurethane)	Gray	M-800-CT 15 WB	17044
250	Ø400x130	200	Ø20	4,3	Puncture proof (foamed polyurethane)	Gray	M-800-CT 20 WB	17936
250	Ø400x130	250	Ø20	4,3	Puncture proof (foamed polyurethane)	Gray	M-800-CT 25 WB	17937