

**M-210-L4**

# BRICK WHEELBARROW REINFORCED

## Reinforced Brick wheelbarrow with pneumatic tyre, capacity 250 Kg.

M-210-L4 reinforced brick wheelbarrow with pneumatic tyre.

Loadcapacity: 60-bricks.

Extra shore reinforcement (1).

Beamreinforcement (2).

Handle height: 500mm.

Height: front end 540mm.


Steel rim with double closed ball bearings.

4ply pneumatic tyre.

Wear pads to extend the lifetime of the legs.

Ergonomic natural rubber handles especially devised to the form of your hand.

Finished with a powder coating in grey. (no solvents, less harmful to the environment).

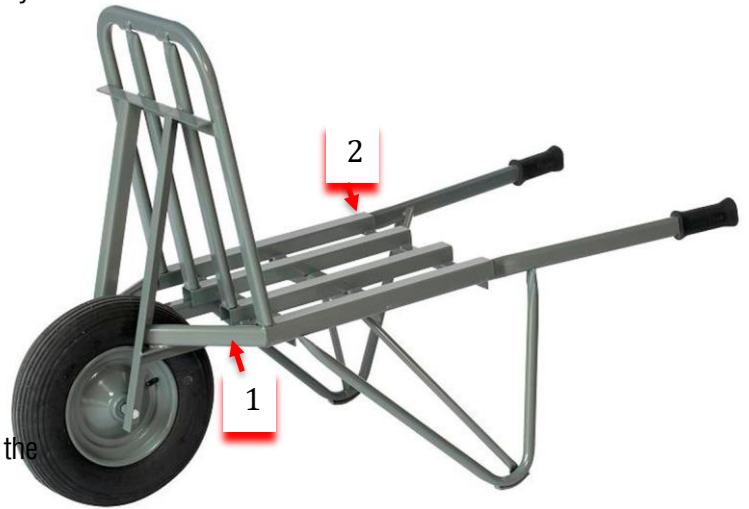

10912  
M-210-L4

- \* Oval tube (lighter and stronger).
- \* Extra shore reinforcement (1).
- \* Beamreinforcement (2).
- \* Natural rubber handle especially the shape of your hand.
- \* 4ply pneumatic tyre.
- \* Steel rim with double sealed ball bearings.



11264  
M-970-Z-RUB



11170  
M-800-L4

Cap. (kg)	Dimensions overall LxWxH (mm)	Dimensions platform LxWxH (mm)	Weight (kg)	Height front-end (mm)	Wheel Ø (mm)	Wheels	Colour frame	Handgrip LxW (mm)	Article	Article-nr
250	1440x600x940	450x450	17,8	540	400	Pneumatique	Gray	38x20	M-210-L4	10912
250	400x100		3		400	Pneumatique			M-800-L4	11170
	130x55x38		0,11					38x20	M-970-Z-RUB	11264