


END OPEN TYPE



END-FICHE

For installation information please refer to the tooling overview and manuals on our website www.scell-it.com
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Pro informace ohledně montáže navštivte naše webové stránky nebo nahlédněte do manuálu k nářadí.

ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Insert / Knurled	Ecrou / Cranté	Einnietmutter / Gerillt	nýtovací matice / s rýhovaným dřikem
Cylindrical head	Tête plate	Flachrundkopf	plochá hlava
Stainless steel A2	Inox A2	Edelstahl A2	nerez A2

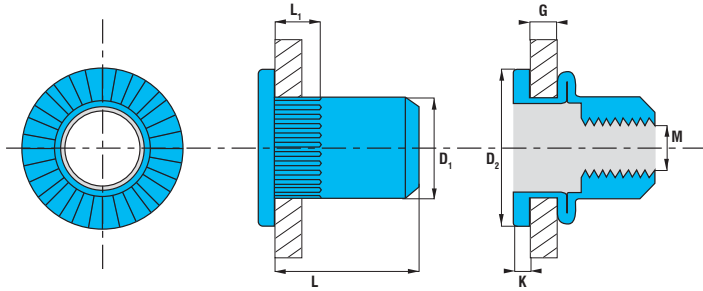

PART NO/REF	M	D ₁	D ₂	K	L	L ₁	G
	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(mm)	min-max (mm)
END0330	M3	4.9	7.0	0.9	10.0	4.0	0.5-3.0
END0430	M4	5.9	9.0	1.0	10.0	4.0	0.3-3.0
END0440					11.5	5.0	3.1-4.0
END0530	M5	6.9	10.0	1.0	12.0	4.0	0.3-3.0
END0540					15.0	5.0	3.1-4.0
END0630	M6	8.9	13.0	1.5	14.5	4.0	0.5-3.0
END0645					16.0	5.5	3.1-4.5
END0830	M8	10.9	16.0	1.5	16.0	4.0	0.5-3.0
END0855					18.5	6.5	3.1-5.5
END1030	M10	12.9	19.0	2.0	17.0	4.0	0.5-3.0
END1060					22.0	7.0	3.1-6.0

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(mm)	(Nm)	(N)	(N)
M3	5.0	1.5	3 800	900
M4	6.0	7.0	6 800	2 600
M5	7.0	10.0	11 700	2 900
M6	9.0	20.0	18 000	4 900
M8	11.0	28.0	24 000	6 800
M10	13.0	38.0	29 000	7 800

UNIT PLANT CERTIFICATES

ISO 9001:2000
 ISO 14001
 TS 16949

Scell-it®
 Engineering & Development

© 2009 Blue future Intellectual Properties

Data shown are subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Scell-it representative is at your disposal should you need to confirm latest information.