



ENR OPEN TYPE

For installation information please refer to the tooling overview and manuals on our website www.scell-it.com
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Pro informace ohledně montáže navštivte naše webové stránky nebo nahlédněte do manuálu k nářadí.



ENR-FICHE

ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Insert / Knurled	Ecrou / Cranté	Einnietmutter / Gerillt	nýtovací matice / s rýhovaným dřikem
Reduced countersunk head	Tête réduite à 90°	Kleiner senkkopf	redukováaná hlava
Stainless steel A2	Inox A2	Edelstahl A2	nerez A2

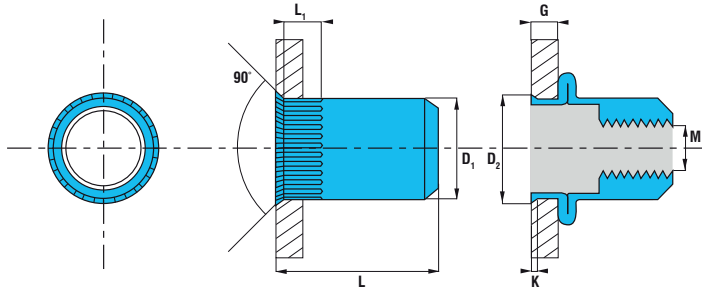

PART NO/REF	M	D ₁	D ₂	K	L	L ₁	G
	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(mm)	min-max (mm)
ENR0430	M4	5.9	7.0	0.6	10.0	4.0	0.5-3.0
ENR0530	M5	6.9	8.0	0.6	11.5	4.0	0.5-3.0
ENR0630	M6	8.9	10.0	0.6	14.0	4.0	0.5-3.0
ENR0830	M8	10.9	12.0	0.6	15.5	4.0	0.5-3.0
ENR1035	M10	12.9	13.5	0.8	19.5	4.5	0.8-3.5

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	7.0	6 800	2 600
M5	7.0	10.0	11 700	2 900
M6	9.0	20.0	18 000	4 900
M8	11.0	28.0	24 000	6 800
M10	13.0	38.0	29 000	7 800

UNIT PLANT CERTIFICATES



Scell-it®
 Engineering & Development

© 2009 Blue future Intellectual Proterities

Data shown are subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Scell-it representative is at your disposal should you need to confirm latest information.