

**M-NST300-CT
ALU + LIFT**

ALUMINUM HANDTRUCK

Professional aluminum handtruck with lift system and stairguide

Handtruck M-NST-300-CT aluminum with lift system and stairguide.

Flat back, ideal for boxes and crates.

Fixed plate, (WxD) 285x240mm, 6mm thick.

Lifting platform, (WxD) 450x300mm, 6mm thick

Load capacity 100 kg.

Secured by a transparent plexiglass plate to protect the hands and other body parts.

Lifting range: 12-882 mm, by means of a ratchet with backstop.

Made entirely of aluminum.

Oval aluminum tube for a better grip.

More stability thanks to an extra wide wheelbase.

Large plastic guides to overcome stairs and thresholds without damage.

These guides are made of very strong LLDPE (Linear Low Density Polyethylene).

Oval ergonomic rubber safety handles with knuckle protection.



Equipped with puncture-proof tyres.



Transparent plexiglass plate to protect the hands and other body



Ratchet with backstop

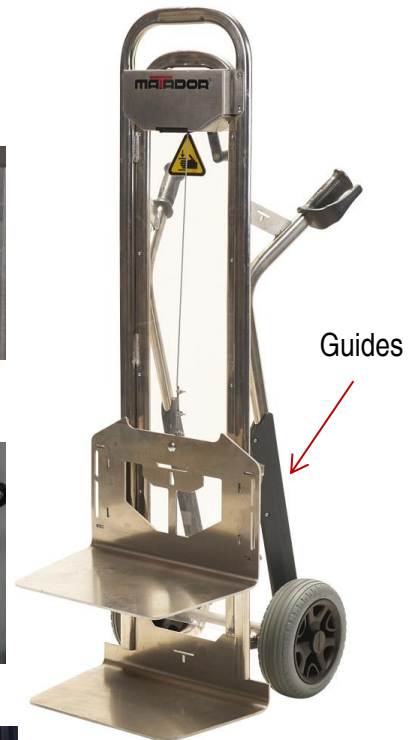

Guides

18782
M-NST300CT ALU +LIFT



12337
Ergo handgrip with
knuckle protection



18781
M-NST-TRAPGELEIDER



10189
Puncture proof tyre
(foamed polyurethane)

- * Flat back, ideal for boxes and crates.
- * Fixed pitch, (WxD) 285x240mm, 6mm thick.
- * Lifting platform, (WxD) 450x300mm, 6mm thick.
- * Oval aluminum tube for a better grip.
- * Oval ergonomic rubber safety handles with knuckle protection.
- * With large plastic guides to overcome stairs and thresholds without damage.

Cap. (kg)	Dim. Plate LxW (mm)	Total Height (mm)	Totale width (mm)	Total depth (mm)	Dim. Guide LxWxH (mm)	Weight (kg)	Tyre	Axle hole Ø(mm)	Dim wheels Ø (mm)	Article	Article -nr.
100	Fixed: 285x240 Lifting platform: 450x300	1452	650	579		19,6	Puncture-proof	25	260x85	M-NST300-CT ALU+LIFT	18782
200						1,6	Puncture-proof	25	260x85	M-808-CT AS Ø25MM KL	10189
		130	58	90		0,18				M-970-Z MET KNOKKELB	12337
					510x65x20/30	0,28				M-NST-Stairguide (1 piece)	18781