



HeavyCoat

Hydraulic piston pumps



- Power packs for high viscosity materials
- Extremely powerful
- Versatile and flexible



Get excited!

WAGNER HeavyCoat units convince with numerous details. They are the first choice for demanding large construction sites and frequent usage:

- **Market leading performance** in it's section: a maximum pressure of 25 MPa allows greater hose lengths - versatile in use thanks to a high delivery rate
- Absolutely **reliable**: Proven technology for more profit due to particularly quick construction site completion
- Innovative HeavyCoat **product features**: Choose between petrol engine or electric drive (also convertible within a few minutes) - With SSP you can order additionally even more power - Quick exchanging of containers, easy cleaning and transport thanks to swivelling pump unit Swing Cart etc.
- Plus **unmatched WAGNER service**: A dependable, reliable network of authorised sales and service distributors guarantees short response in the case of emergency
- **Longest warranty** in the industry: 3+2 guarantee - two additional years by online product registration

Additional power "SpecialSprayPower" for high viscosity materials

The patented SSP System from WAGNER is a **unique development** for the application of **high viscosity materials** such as for example airless spraying plasters, adhesives and bituminous paints. Thanks to the special design of the system, the pump is **continually filled** with sufficient paint material by the shovel piston. It is possible to work without pulsation or malfunction.

"SpecialSprayPower" is available for both HeavyCoat units. Decide yourself how much performance you need.



SSP
SPECIALSPRAYPOWER

Power packs with high performance thanks to hydraulic pump technology



The material pump of the HeavyCoat units is driven indirectly by hydraulics. This has the advantage that the shovel piston has a distinctly longer and slower stroke than with direct drive electric pumps. The **high suction power improves** the application of **high viscosity materials**.

The **low wear rate** and the resulting long service life of the equipment are further positive aspects of hydraulic technology. The wear surfaces of cylinder and piston rod are coated with an extremely wear resistant layer of hard chrome, making them **able to withstand** aggressive and abrasive materials.




The pressure can be **smoothly regulated up to 25 MPa** for perfect matching.

Advantages of the hydraulic piston pumps at a glance:

- Steady performance for applying heavy, filled and high viscosity materials such as e.g. bituminous paints and fillers on large construction sites
- High power also in combination with long hoses
- Versatile and robust for usage on demanding construction sites

Strong for high viscosity materials and large objects


The HeavyCoat family, with its special technology, offers a wide range of use for the application of high viscosity materials both indoors and out.

	Materials	Object size	Model			
			HC 950	HC 970	HC 950 SSP	HC 970 SSP
	flame retardants, emulsion paints, latex paints, fabric adhesives, anti-corrosive agents, iron mica paints, zinc dust recommended nozzle size: FineFinish 0.017" - 0.032"	up to 200 m ²	✓	✓	✓	✓
		200 m ² - 800 m ²	✓	✓	✓	✓
		more than 800 m ²		✓	✓	✓
	thick coating materials, bituminous coatings recommended nozzle size: 0.027" - 0.052"	up to 200 m ²	✓	✓	✓	✓
		200 m ² - 800 m ²		✓	✓	✓
		more than 800 m ²		✓	✓	✓
	Airless filler recommended nozzle size: 0.027" - 0.052"	up to 200 m ²	✓	✓	✓	✓
		200 m ² - 800 m ²			✓	✓
		more than 800 m ²				✓

✓ = suitable

Versatile and robust for usage on demanding construction sites

Quality for spraying, in the high performance range too – with the AG 14 professional gun from WAGNER. In combination with the TradeTip 2 nozzle system even **high viscosity materials** can be sprayed without problems.




A pleasure: The adjustable height telescopic handle makes for convenient transport on the building site or in the car.

The swing cart makes it possible to swing up the pump: **Practical** when working from a bucket or a container but also for transport.

The unit can be **safely depressurised** and quickly cleaned in a single operation.

HeavyCoat special hose with a 3/8", 1/2" or 3/4" cross section for a **better spraying performance**.

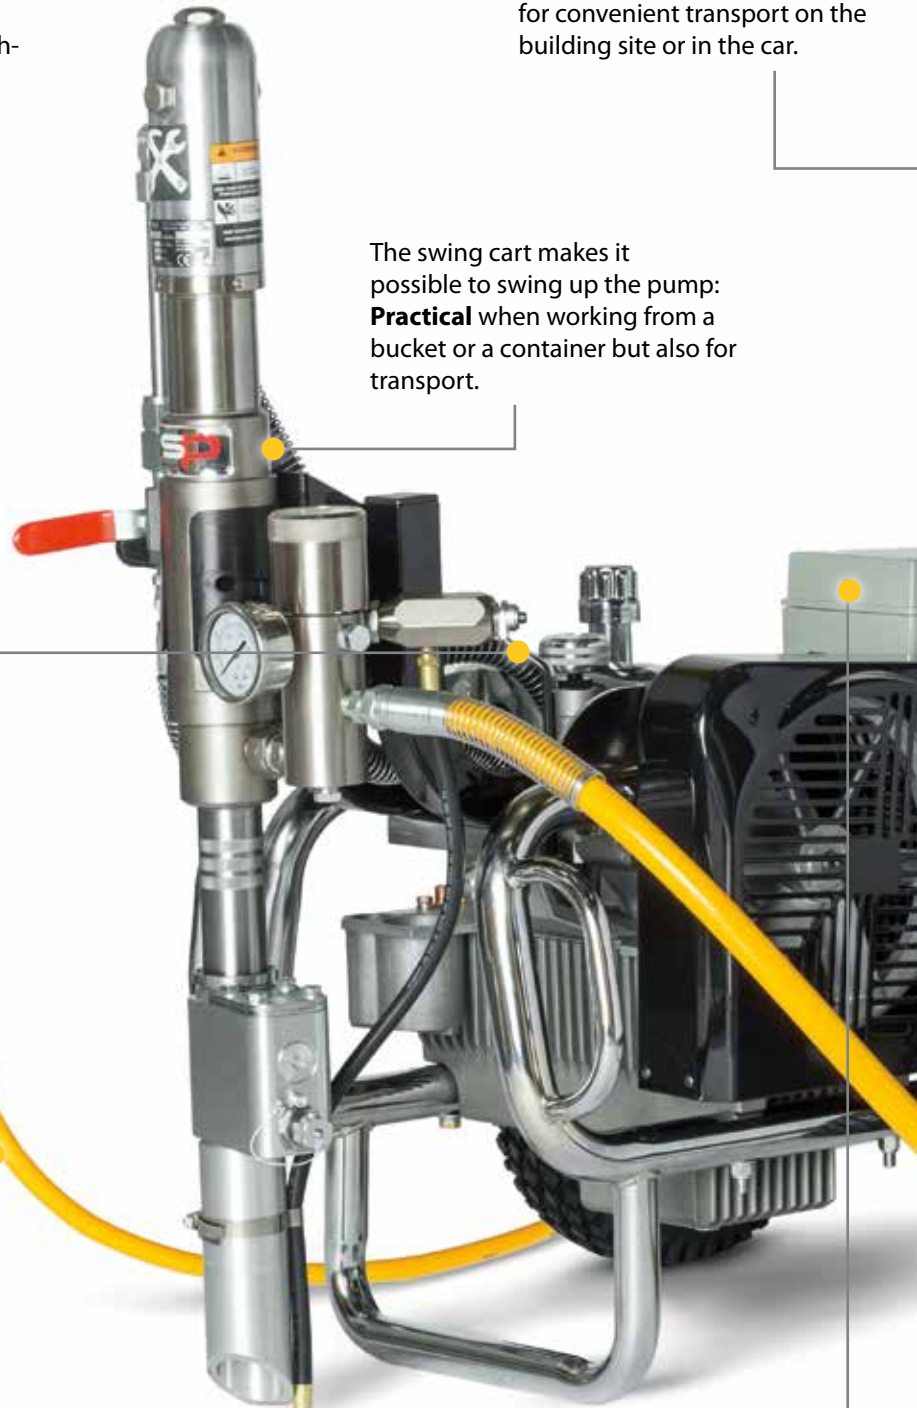

With a **choice** of 230 V or 400 V electric drive or independent of mains electricity with the Honda petrol engine. The right answer for every application: All HC units can be converted from **electric to petrol drive** (or vice versa) in a few minutes! This makes them independent and able to be used on building sites with no power supply. The powerful electric motors and the petrol driven Honda engines are extremely reliable and longlasting. You have the choice!

Tidied up and out of the way: With the integral support hoses up to a length of 60 m can be practically stowed away.



The tyres filled with sealing gel avoid punctures and allow **easy and convenient transport** – even on difficult sites.



Ideally equipped for working on large construction sites

When the SSP System is combined with the large volume container, the HeavyCoat 950 or 970 becomes a perfect **spraying unit** for the application of Airless spray fillers.

With the easily fitted hopper (up to 100 litre capacity), large areas can be sprayed without refilling. A pressing lid with press-out roller and wide range of accessories such as filler nozzles and extensions, make the user's **work effective and profitable.**



HeavyCoat 950 - Power pack for high viscosity materials



HC 950 E/G



- Spraypack:
 Basic unit
 + Airless gun AG 14
 + 3/8" HP hose yellow, 15 m
 + Connector for the gun
 + TradeTip 2 nozzle holder
 + 2SpeedTip nozzle D40 117/427

HC 950 E Order no. 2332 184
 HC 950 G Order no. 2332 186

HC 950 E/G + SSP



- Spraypack:
 Basic unit
 + Airless gun AG 14
 + 1/2" HP hose yellow, 15 m
 + 3/8" hose antenna, 2.5 m
 + Connector for the gun
 + Double connector
 + TradeTip 2 nozzle holder
 + 2SpeedTip nozzle S20 539/243

HC 950 E SSP Order no. 2332 187
 HC 950 G SSP Order no. 2332 189



Technical data	HC 950 E (+ SSP)	HC 950 G (+ SSP)	HC 970 E (+ SSP)	HC 970 G (+ SSP)
Power	3.1 kW / 4 PS	4.1 kW / 5.5 PS	5.5 kW / 7.5 PS	6 kW / 8 PS
Voltage	230 V	230 V	400 V	400 V
Weight	83 kg (84 kg SSP)	76 kg (77 kg SSP)	100 kg (101 kg SSP)	88 kg (89 kg SSP)
Max. pressure	25 MPa	25 MPa	25 MPa	25 MPa
Max. delivery rate	6.6 l/min	8 l/min	10 l/min	12 l/min
Max. nozzle size	0.052"	0.052"	0.056"	0.056"



HeavyCoat 970 - Xtra speed for XL-projects



HC 970 E/G



Spraypack:

Basic unit


- + Airless gun AG 14
- + 3/8" HP hose yellow, 15 m
- + Connector for the gun
- + TradeTip 2 nozzle holder
- + 2SpeedTip nozzle D40 117/427

HC 970 E Order no. 2332 191

HC 970 G Order no. 2332 192



HC 970 E/G + SSP



Spraypack:

Basic unit

- + Airless gun AG 14
- + 1/2" HP hose yellow, 15 m
- + 3/8" hose antenna, 2.5 m
- + Connector for the gun
- + Double connector
- + TradeTip 2 nozzle holder
- + 2SpeedTip nozzle S20 539/243

HC 970 E SSP Order no. 2332 193

HC 970 G SSP Order no. 2332 194

3+2 WAGNER
ProfiGuarantee

www.wagner-groups.com/profi-guarantee/

Guarantee-Offensive!

With each newly purchased professional paint spraying unit you will now get a 3 year manufacturer's guarantee from WAGNER.

Ensure two additional years of guarantee with your Online registration. This is unique in the industry! Because: We are convinced of our professional quality. Take our word for it!



Original WAGNER HeavyCoat accessories


Suction systems



With the HeavyCoat piston pumps material can be applied directly from a 120 litre drum or from large containers.

- 0349 907 Container suction system, incl. C coupling
- 9991 651 Reduction adapter, B to C coupling
- 0097 305 Blanking plug for C coupling

Filler accessories



The texture-effect set with a large selection of texture nozzles is ideal for applying decorative spray filler.

- 0258 720 Texture-effect set

Guns



Along with the nozzle and spray unit, the gun is at the heart of any spraying process. The AG 14 Profi Airless gun with its low trigger effort ensures the greatest working comfort.

- 0502 166 AG 14 Airless gun, F-thread incl. nozzle holder
- 0502 119 AG 14 Airless gun, G-thread incl. nozzle holder

Hoses and connectors



WAGNER offers a wide range of high pressure hoses for different material applications and radii of action.

- 2336 583 HP hose DN10 / 25 MPa / NPSM 3/8" / 15 m
- 2336 585 HP hose DN13 / 25 MPa / NPSM 1/2" / 15 m
- 2336 582 Hose antenna DN10 / NPSM 3/8" / 2.5 m
- 0179 732 Adapter
A = NPS 3/8" I = NPS 1/4"
- 3203 026 Double connector
A = 1/2" x A = 3/8"
- 0256 343 Double connector A = 3/8" x A = 3/8" hose connector
- 3202 901 Double connector A = 1/2" x A = 1/2" hose connector
- 9985 781 Double connector A = 3/4" x A = 3/4" hose connector

Large volume container



The large volume container, with a capacity of up to 100 litres, makes it possible to cover large surface areas – without refilling. Its easy, quick assembly and disassembly also provide increased flexibility on the building site.

- 2309 955 Large volume container with sack support incl. roller press

Nozzles



For optimal matching to the object, the **TradeTip 2 nozzles** offer a wide spectrum of use and are available in various types and sizes.

Now you can work even faster and more flexibly. With the **2SpeedTip nozzles** you can swap between two nozzle sizes with just one twist. The nozzle is available in various nozzle combinations.

An overview of all nozzle sizes can be found on our homepage or in our full catalogue "The Compass".

Nozzle extensions up to 60 cm



The use of nozzle extensions saves using ladders and scaffolding, extends the radius of action for objects with large surfaces and thus increases working flexibility.

- 0556 051 Nozzle extension 15 cm, F-thread
- 0556 052 Nozzle extension 30 cm, F-thread
- 0556 053 Nozzle extension 45 cm, F-thread
- 0556 054 Nozzle extension 60 cm, F-thread
- 0556 074 Nozzle extension 15 cm, G-thread
- 0556 075 Nozzle extension 30 cm, G-thread
- 0556 076 Nozzle extension 45 cm, G-thread
- 0556 077 Nozzle extension 60 cm, G-thread